


ROCK-LINED SHOULDER DITCH  
IN FILL SECTION

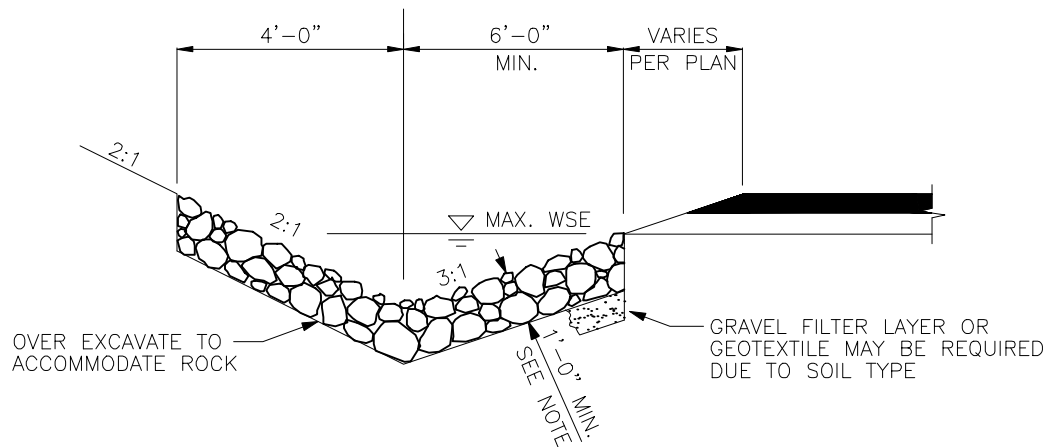

ROCK-LINED SHOULDER DITCH  
IN CUT SECTION

NOTES:

1. ROCK LINED DITCHES TO BE USED WHEN FLOW VELOCITIES EXCEED 4 FPS.
2. ROCK SIZE AND DEPTH DEPENDENT ON FLOW VELOCITY. MINIMUM ROCK SIZE 2"-4" QUARRY SPALLS.



City of  
Bellevue

STORM AND SURFACE  
WATER UTILITY

TITLE

ROCK-LINED DITCHES

JANUARY 2012

NO SCALE

NO. D-35